

BANNER PRINTING ON MAC OS

All eBN 2 and 3 Models



Scope of Disclosure	Public
Classification	Standard
Handling	Do not copy or transfer
Document Type	Guide

This page has been left intentionally blank


Device List

e-BRIDGE Next Series III	
Colour	
▪ e-STUDIO2020AC / e-STUDIO2021AC ▪ e-STUDIO2525AC / 3025AC / 3525AC / 4525AC / 5025AC / 6525AC ▪ e-STUDIO5516AC / 6516AC / 7516AC ▪ e-STUDIO401AC / 331AC	
Monochrome	
▪ e-STUDIO2528A / 5528A / 6528A ▪ e-STUDIO7529A / 9029A	
e-BRIDGE Next Series II	
Colour	
▪ e-STUDIO2010AC ▪ e-STUDIO2515AC / 3015AC / 3515AC / 4515AC / 5015AC ▪ e-STUDIO5516AC / 6516AC / 7516AC ▪ e-STUDIO400AC / 330AC	
Monochrome	
▪ e-STUDIO2518A ▪ e-STUDIO5518A / 7518A / 8518A	


Printing Banner Paper on an Apple Mac

Procedure


1. Open PowerPoint and go to the menu "File → Page Setup". Then select "Manage Custom Sizes". Select the "+" icon and then create the custom page size. In this example we have used 300 x 900 mm. The maximum size allowable for a banner page is 1200 x 305 using a Toshiba MFD. Add size and choose orientation.

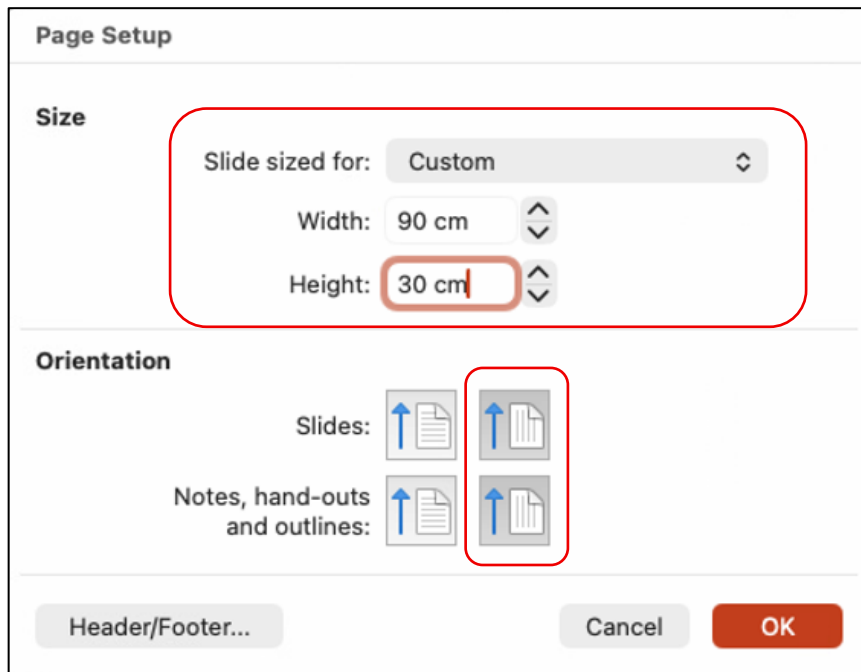


2. Next you will need to create a Customer Paper Size in your Pring Dialogue Window. Then save

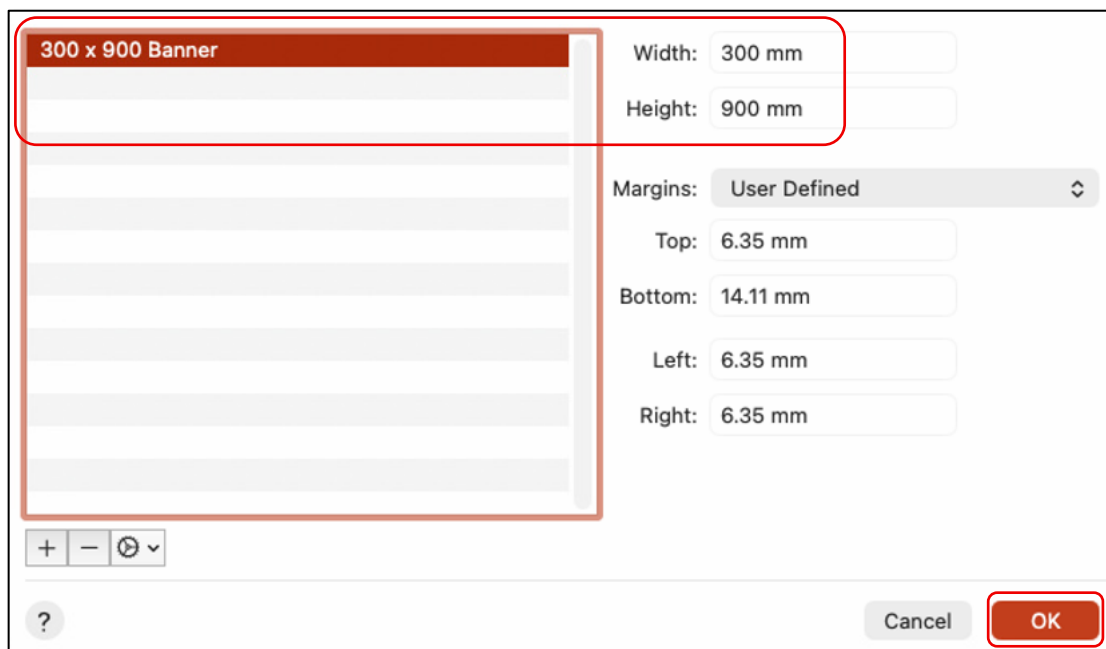


3. Next in the Print Dialogue Choose Paper Size 300 x 900 Banner

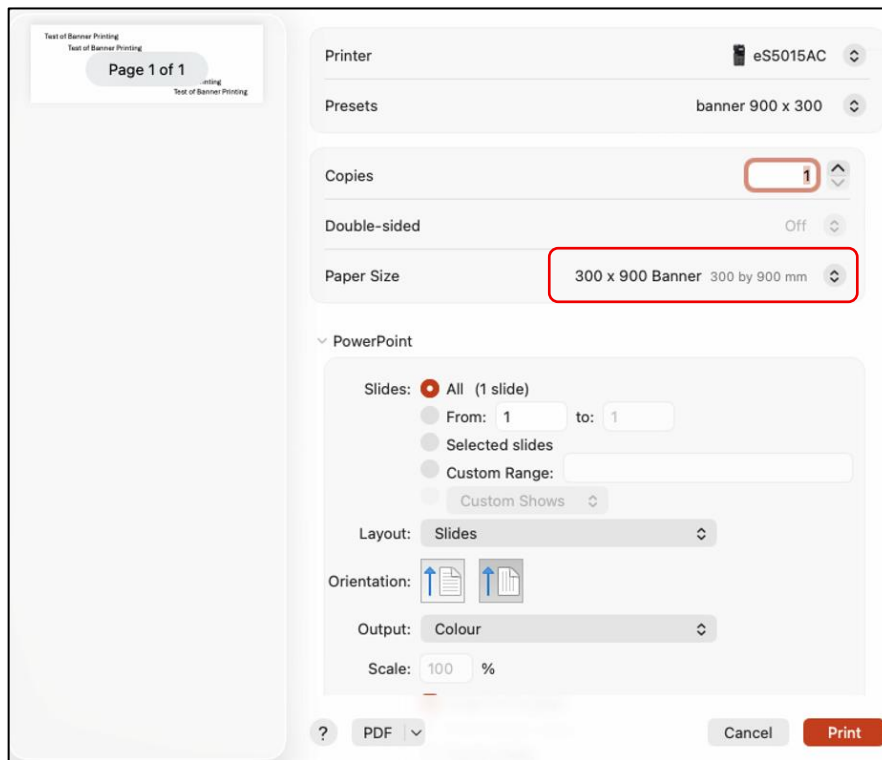


4. Next choose Paper Feed, and choose Bypass Tray

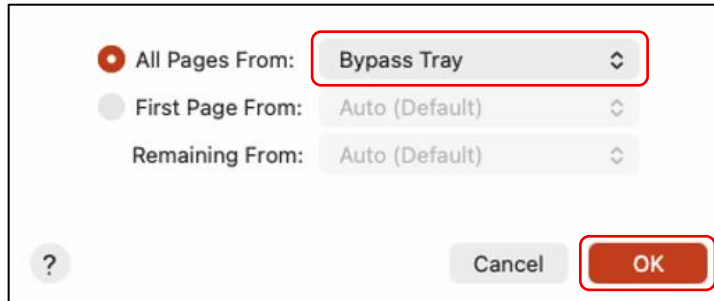


5. Next Choose Finishing and pick Tray 1 as Destination and Special1 (Media Types may vary)

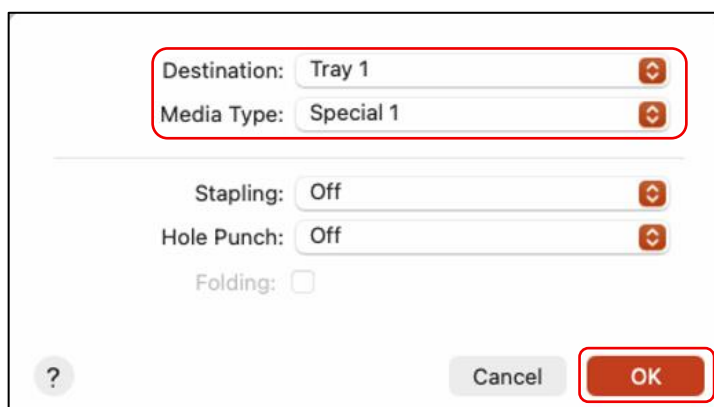

- Choose Paper Handling. Click on the Scale to Fit Paper Slider and choose the Destination Paper Size as Banner

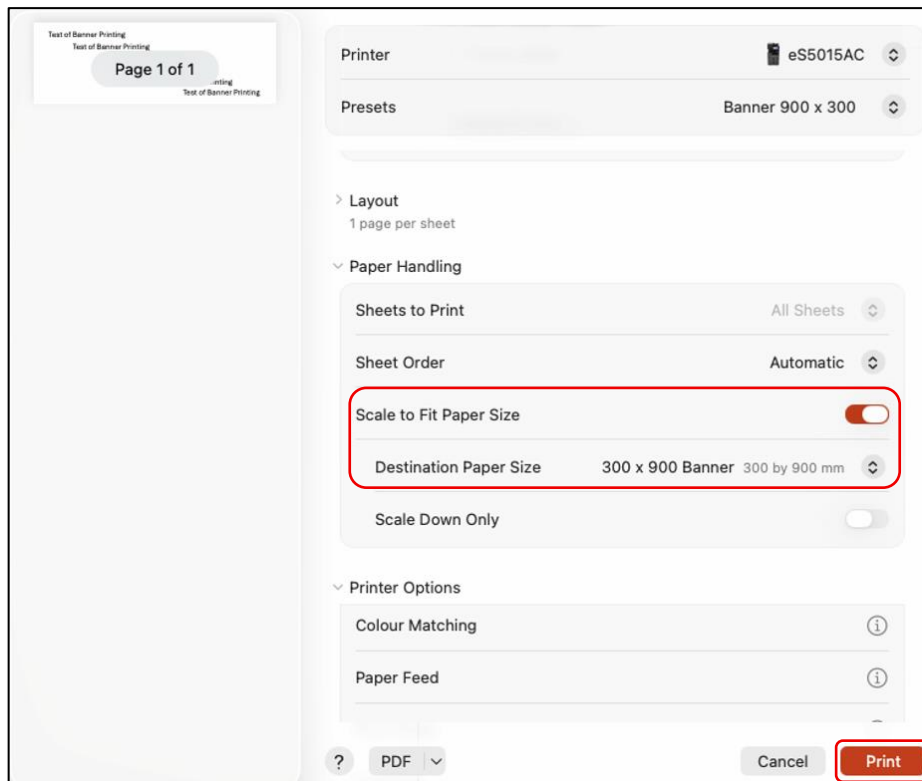


- At the MFD control panel press "Job Status". The front panel of the copier should now appear as below, requesting 300 x 900 to be loaded in the bypass (the Banner sheet will not fit in a drawer)

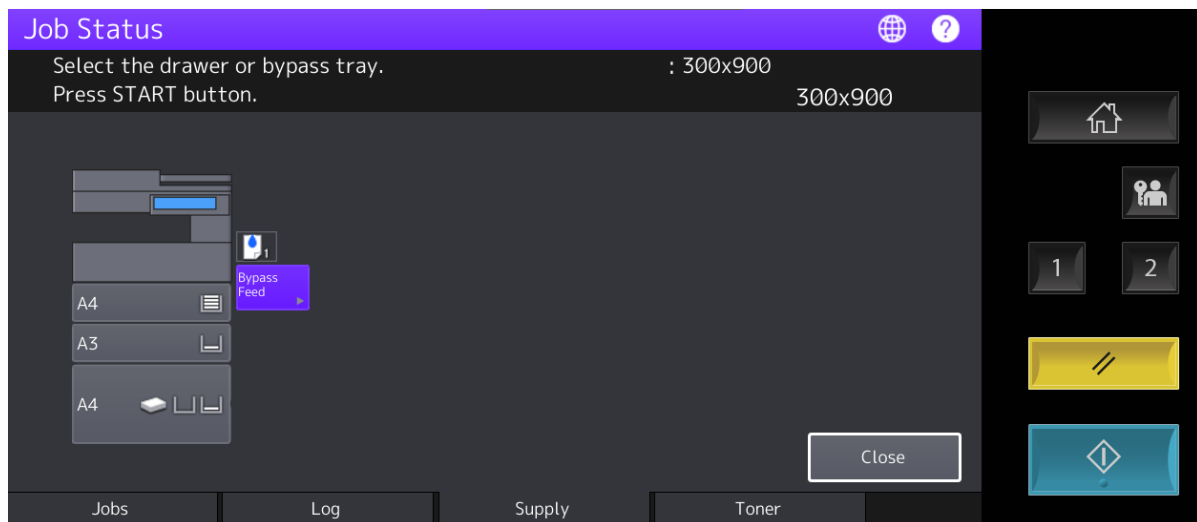

- eBN3 models will simply feed the media after confirmation. Earlier eBN2 Models you will have to move the green lever on the Manual feed the right. Load the media and flip to the left so it recognises it is loaded.

9. Optional: Final setup, save this as a preset. You can then choose the settings required each time you want to print a banner. Name it and click on ok.

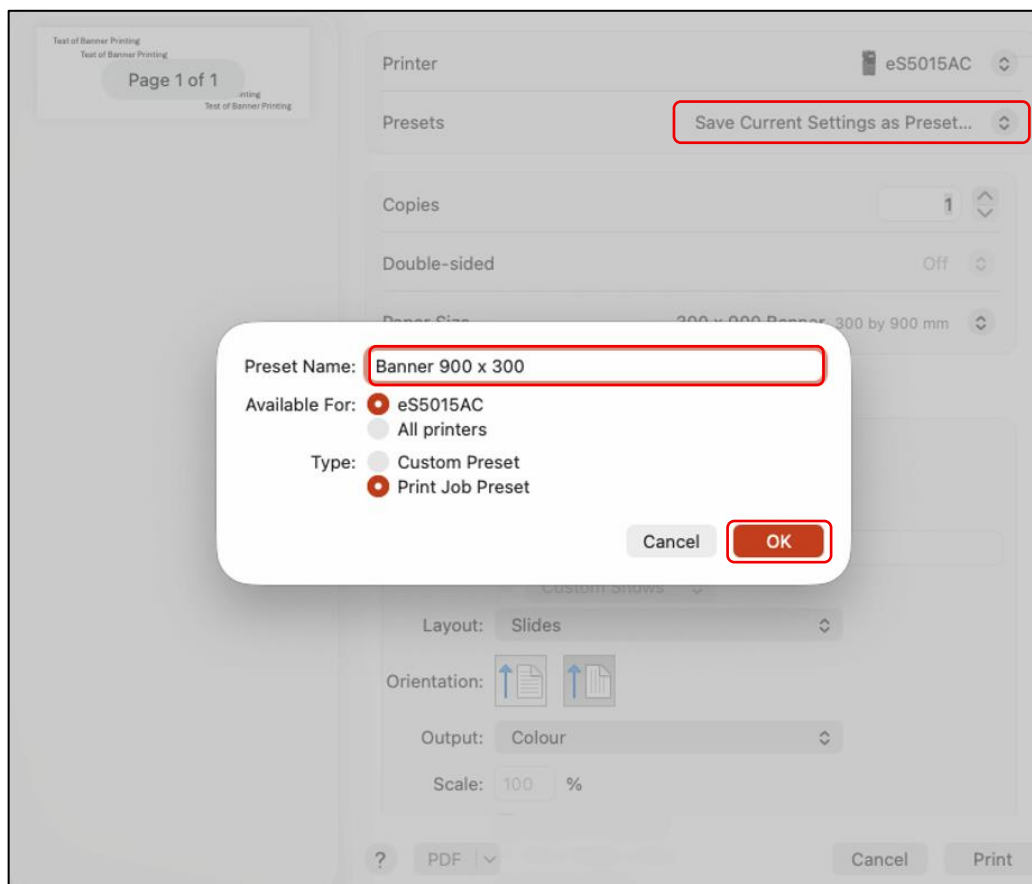

10. Print your Banner.

