



Mail Server Details

Main SMTP Server: mail.bigpond.com

Login: Your bigpond email address

Password: Your password

Port: 25

Authentication: None

Telstra requires DNS entries to be added also. These are all based on the State you are located in.


On your MFD these will generally be found under Network Settings then TCP/IP

New South Wales	Victoria
Primary DNS: 61.9.194.49	Primary DNS: 61.9.133.193
Secondary DNS: 61.9.195.193	Secondary DNS: 61.9.134.49
Queensland	Tasmania
Primary DNS: 61.9.211.33	Primary DNS: 61.9.188.33
Secondary DNS: 61.9.211.1	Secondary DNS: 61.9.134.49
Australian Capital Territory	South Australia
Primary DNS: 61.9.207.1	Primary DNS: 61.9.226.33
Secondary DNS: 61.9.195.193	Secondary DNS: 61.9.194.49
Northern Territory	Western Australia
Primary DNS: 61.9.226.33	Primary DNS: 61.9.242.33
Secondary DNS: 61.9.194.49	Secondary DNS: 61.9.226.33

Setup on the MFD Web Interface

Desktop Series 1

1. Input your printers TCPIP address into your web browser

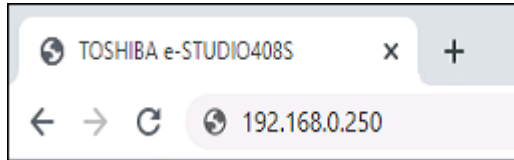

2. Go to Settings > Network Port > SMTP Setup

Settings

SMTP Setup

Primary SMTP Gateway Required.
Primary SMTP Gateway Port Default Port: 25 Range: 1-65535
Secondary SMTP Gateway
Secondary SMTP Gateway Port Default Port: 25 Range: 1-65535
SMTP Timeout Range: 5-30 seconds.
Reply Address Example: jsmith@mydomain.com.
Use SSL/TLS
Validate CA ☐

Authentication

SMTP Server Authentication
Device-Initiated E-mail E-Mail Alerts, Fax Forwarding, etc.
User-Initiated E-mail

Device Credentials

Use Active Directory Device Credentials ☐ Status: Not Joined
Device Userid
Device password
Kerberos 5 REALM Required for some Authentication Types.
NTLM Domain Required for NTLM Authentication.

3. Input your smtp details and hit submit


- Next go to Settings > Network Port > TCPIP

Resolve Hostnames Using DNS	☒	
WINS Server Address	0 0 0 0	If DHCP or BOOTP is not on the network
DNS Server Address	61 9 194 49	If DHCP or BOOTP is not on the network
Backup DNS Server Address	61 9 195 193	
Backup DNS Server Address 2	0 0 0 0	
Backup DNS Server Address 3	0 0 0 0	

- Scroll down to the DNS server address and input the DNS entry that matches your State.
- Press "Submit".

Desktop Series 2

1. Input your printers TCPIP address into your web browser

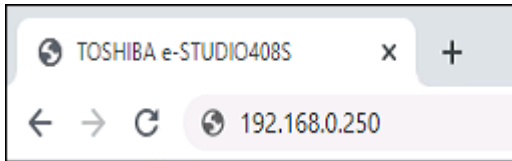

2. Go to Settings > Email Setup

E-mail Setup

Primary SMTP Gateway
mail.bigpond.com
Required.

Primary SMTP Gateway Port
25
Range: 1-65535. Default = 25.

Secondary SMTP Gateway

Secondary SMTP Gateway Port
25
Range: 1-65535. Default = 25.

SMTP Timeout
30
Range: 5-30 seconds

Reply Address
mobileprint.dsf@bigpond.com

Always use SMTP default Reply Address
☐

Use SSL/TLS
Disabled

Require Trusted Certificate
☐

SMTP Server Authentication
Login / Plain

Device-Initiated E-mail
None
E-Mail Alerts, Fax Forwarding, etc.

User-Initiated E-mail
None

Use Active Directory Device Credentials
☐

Device Userid
mobileprint.dsf@bigpond.com

Device Password
.....

Kerberos 5 REALM
Required for some Authentication Types.

NTLM Domain
Required for NTLM Authentication.

Disable "SMTP server not set up" error
☐

Save
Reset

3. Input your SMTP Details and press "Save"

- Next click on Network Ports > TCP/IP


 TCP/IP

Set Hostname	ET0021B707D63A	Example: 'BOBS-PRINTER' (US-ASCII, alphanumeric characters and hyphen only)
Domain Name		test.company.com
Allow DHCP/BOOTP to update NTP server	☒	
Zero Configuration Name	TOSHIBA e-STUDIO408S	Example: Ben's Office Printer
Enable Auto IP	☒	
DNS Server Address	61.9.194.49	If DHCP or BOOTP is not on the network
Backup DNS Server Address	61.9.195.193	


- Input DNS entries then press "Save"

EBN and EBX using TopAccess

1. Input your printers TCPIP address into your web browser

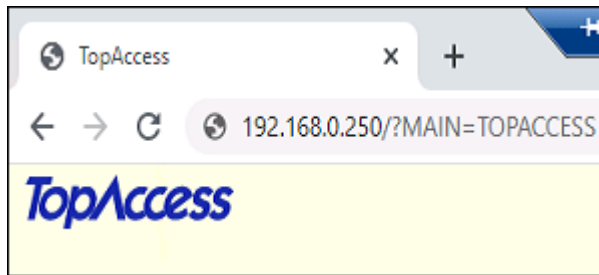

1. Login with User name (admin) and Password (123456)
2. Then click on Administration > Network > SMTP Client

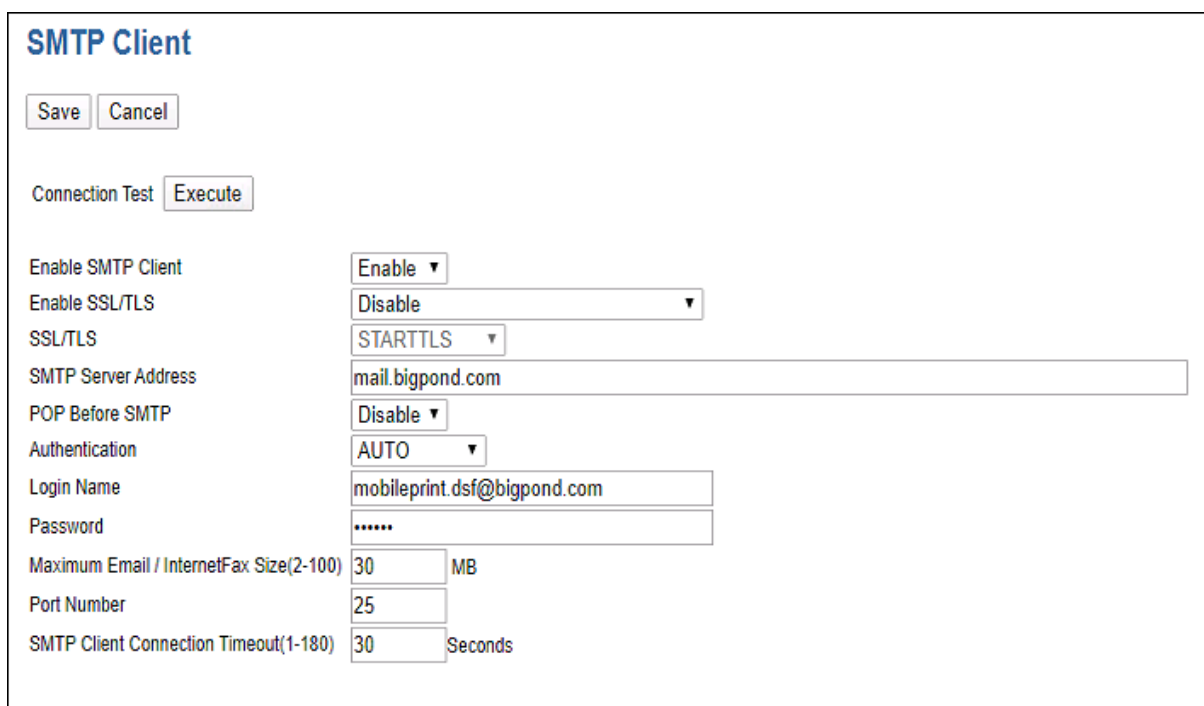

SMTP Client

Save Cancel

Connection Test Execute

Enable SMTP Client Enable ▾

Enable SSL/TLS Disable ▾

SSL/TLS STARTTLS ▾

SMTP Server Address mail.bigpond.com

POP Before SMTP Disable ▾

Authentication AUTO ▾

Login Name mobileprint.dsfi@bigpond.com

Password

Maximum Email / InternetFax Size(2-100) 30 MB

Port Number 25

SMTP Client Connection Timeout(1-180) 30 Seconds

3. Input your SMTP details.
4. Press “Save”
5. Click on “Network”



Basic Setting

Save Cancel

[General Setting](#) [IPv4](#) [IPv6](#) [DNS](#) [DDNS](#) [LLNMR](#)

6. Click on “DNS”

7. Input your DNS entries for Telstra based on your state

DNS				
Enable DNS	Enable ▾			
Primary DNS Server Address	61	9	194	49
Secondary DNS Server Address	61	9	195	193
Primary DNS Server Address(IPv6)				
Secondary DNS Server Address(IPv6)				

8. Scroll to the bottom and press “Save”
9. You also need to set a valid send from address, go to Administration > Setup > Email

General Setting	
From Address	mobileprint.dsfs@bigpond.com
From Name	es5015AC

10. Input a valid email account here.
11. Press “Save”