



TOSHIBA

DRIVER INSTALLATION MAC OSX

Sonoma Operating System



Scope of Disclosure	Public
Classification	Standard
Handling	Do not copy or transfer
Document Type	Guide

Device List


e-BRIDGE Next Series III	
Colour	
▪ e-STUDIO2020AC / e-STUDIO2021AC ▪ e-STUDIO2525AC / 3025AC / 3525AC / 4525AC / 5025AC / 6525AC ▪ e-STUDIO5516AC / 6516AC / 7516AC	
Monochrome	
▪ e-STUDIO2528A / 5528A / 6528A ▪ e-STUDIO7529A / 9029A	
e-BRIDGE Next Series II	
Colour	
▪ e-STUDIO2010AC ▪ e-STUDIO2515AC / 3015AC / 3515AC / 4515AC / 5015AC ▪ e-STUDIO5516AC / 6516AC / 7516AC	
Monochrome	
▪ e-STUDIO2518A ▪ e-STUDIO5518A / 7518A / 8518A	
e-BRIDGE Next Series I	
Colour	
▪ e-STUDIO2000AC ▪ e-STUDIO2505AC / 3005AC / 3505AC / 4505AC / 5005AC ▪ e-STUDIO5506AC / 6506AC / 7506AC	
Monochrome	
▪ e-STUDIO2508A / 3508A / 4508A ▪ e-STUDIO5508A / 7508A / 8508A ▪ e-STUDIO3508LP / 4508LP	

Installing Drivers on Mac OS Sonoma


1. First go to www.toshiba.com.au and click on **"Toshiba Print and Document Solutions"**



2. Click on the **"Drivers"** link

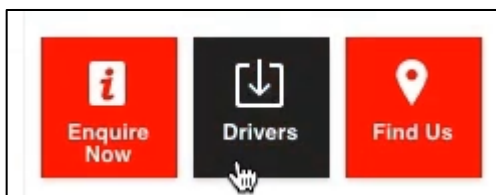

3. Next type in the model number of your printer only, then choose the full model from the red bar above the search engine

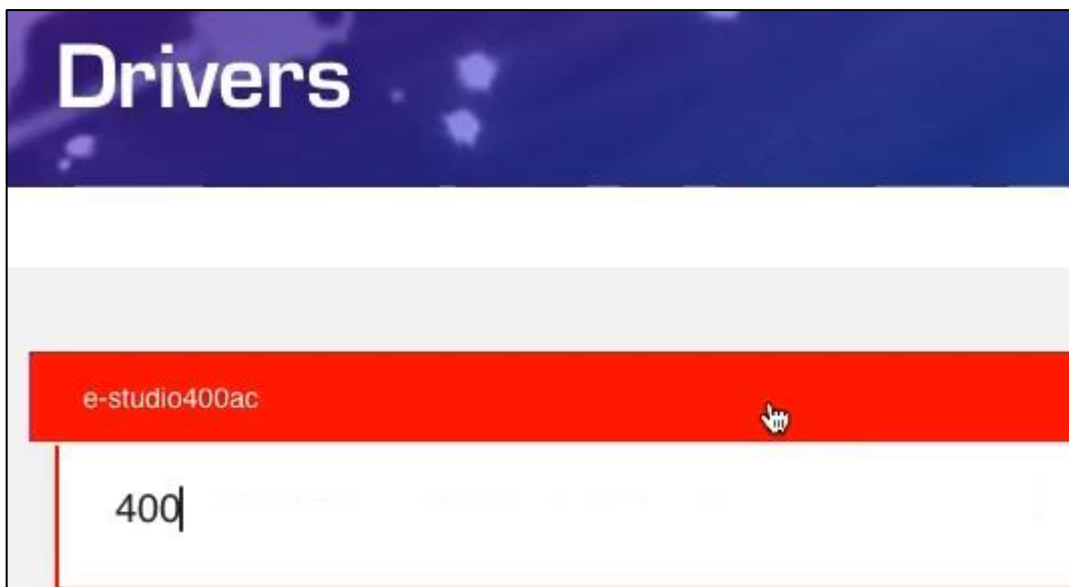

4. Here choose **“macOS”** as your Operating system click **“download”**

Find Another Product


e-STUDIO400AC Search

Operating System macOS


5. Choose your OS you are currently using. Note 14.x drivers are compatible with all OS versions

macOS 10.7 - 12.5	4.8 Mb	Download
macOS 10.12 - 14.x	5.4 Mb	Download

6. Enter the download folder and click on normal (unless you want duplex by default)

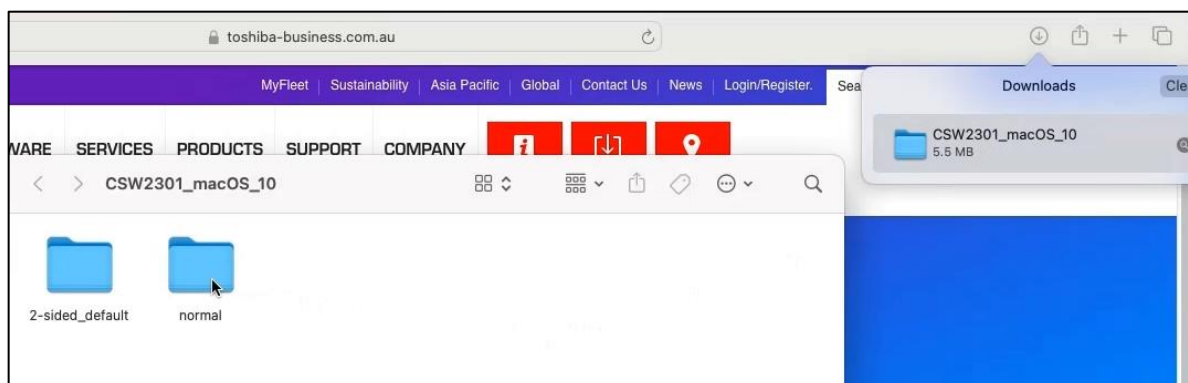


7. Double click on the **“GZ”** file to unpack the **“DMG”**. Then double click on the **“DMG”** File to install

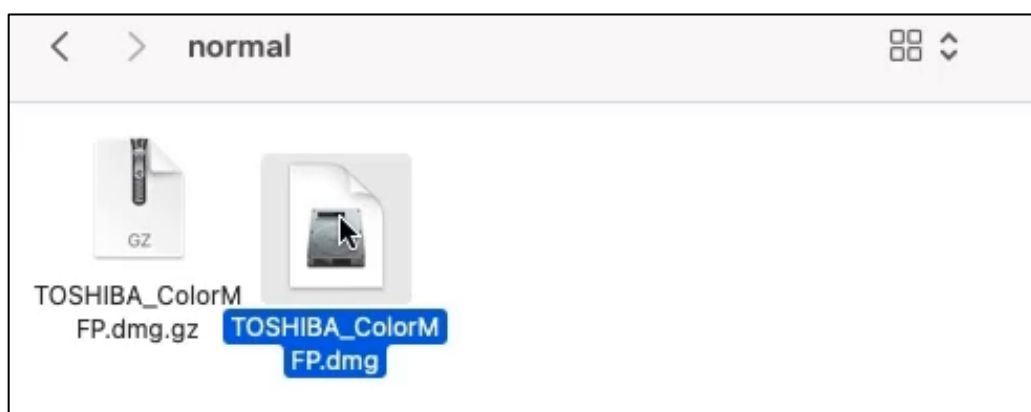

8. Click on the **"TOSHIBA ColourMFP"** installer and follow the prompts




9. Click on **"Continue"**, and then **"Agree"**

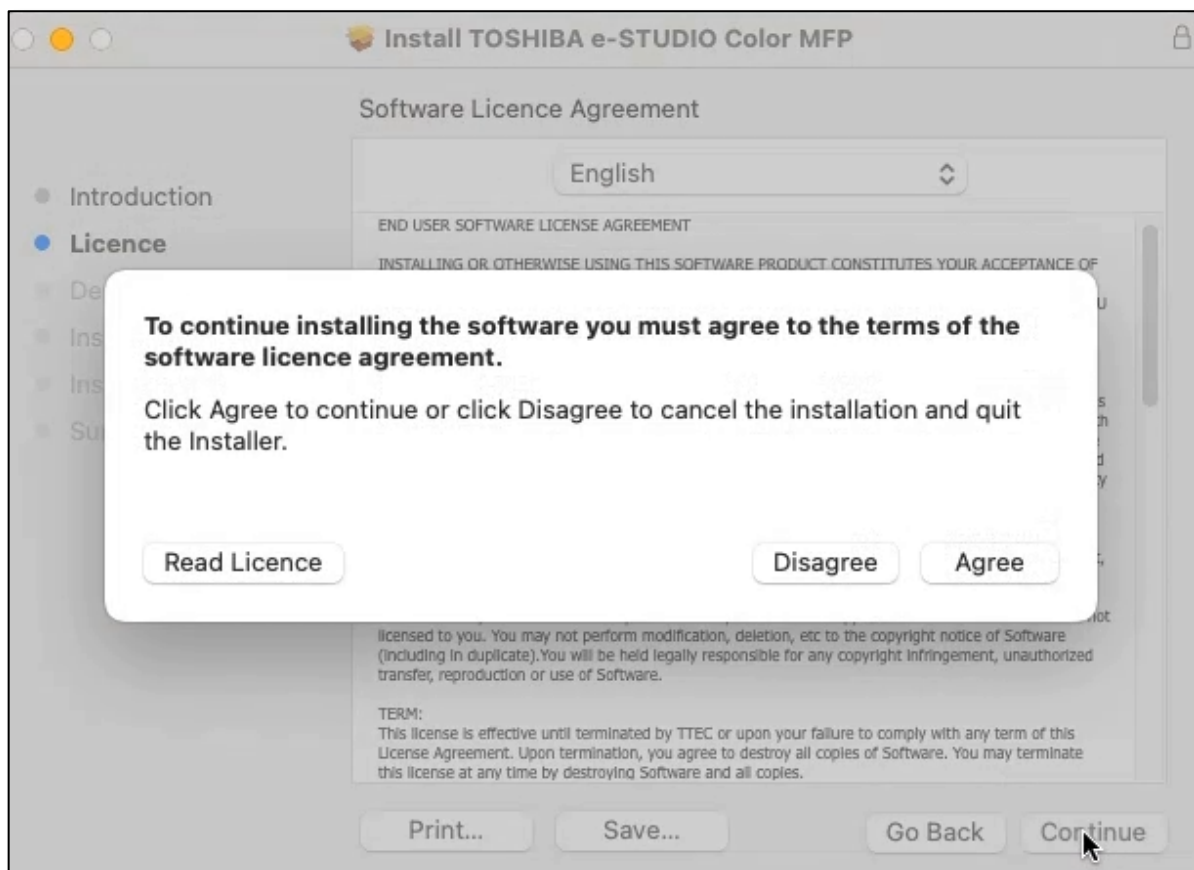

10. Install for all users on this computer, then click **“Continue”**




11. Click on **“Install”**, to install drivers in the Mac Software Library

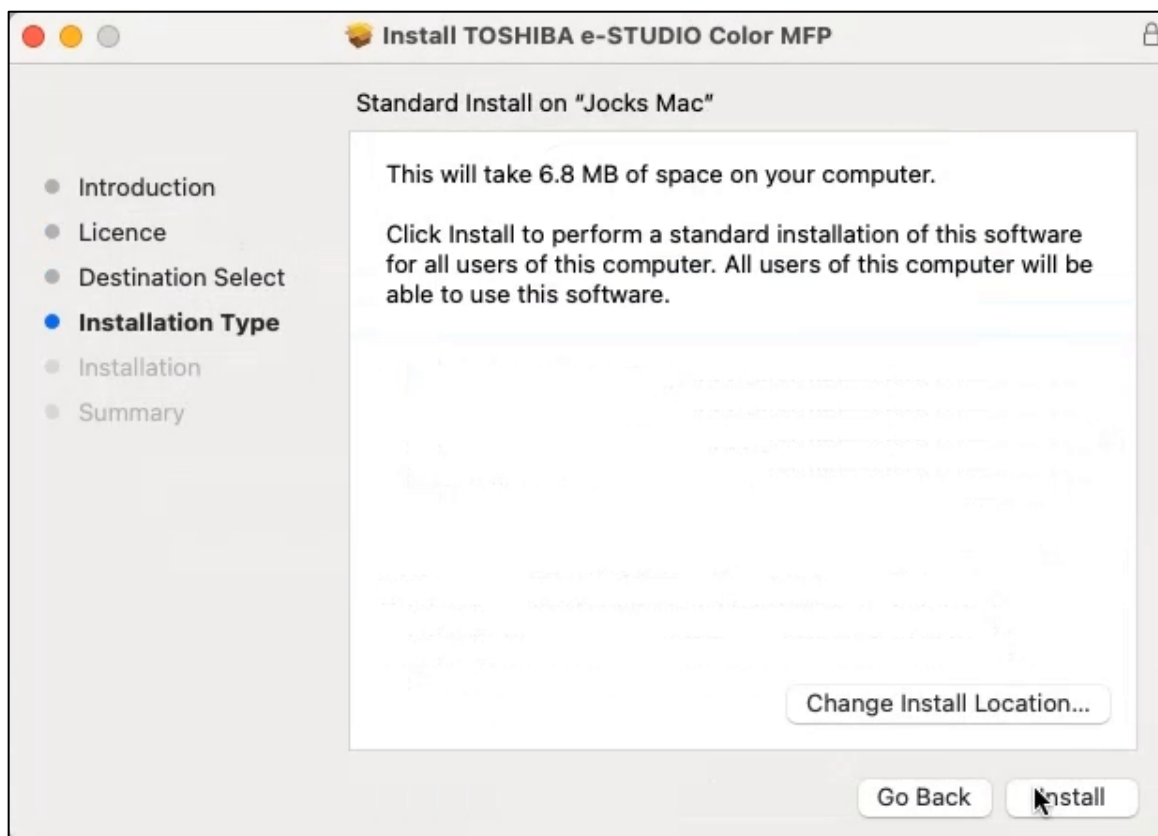

12. Enter your password and then click on **"Install Software"**




13. Follow the prompts until the install is completed

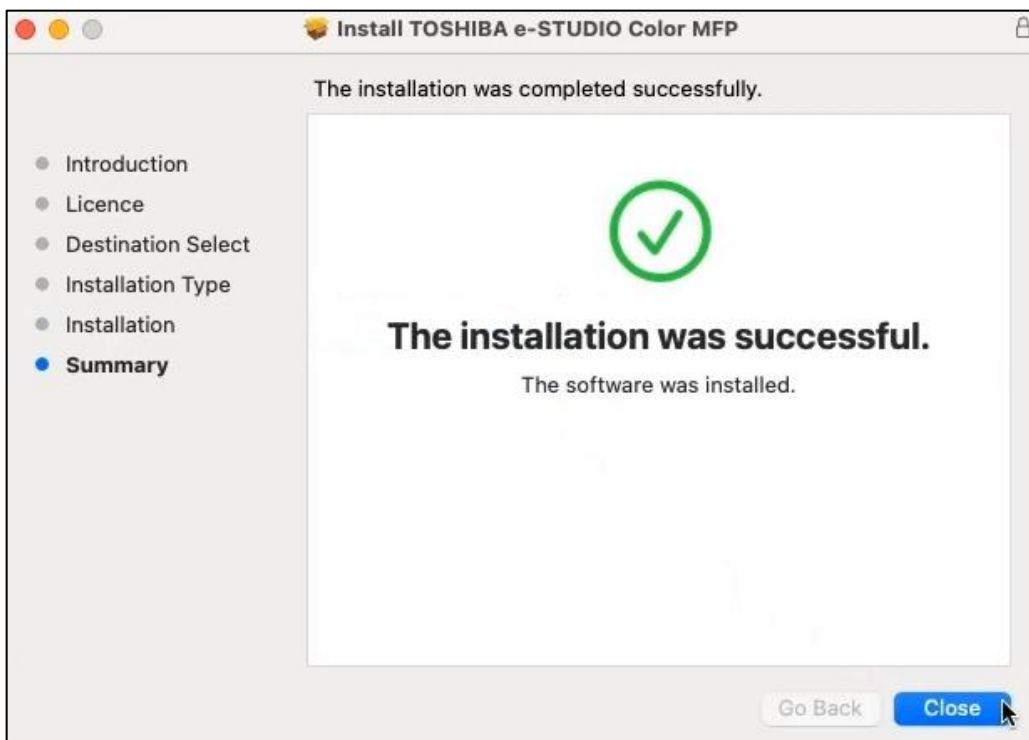

14. You will now be prompted to keep your download driver file or delete it. This step is up to the person installing


15. Click on **“System preferences”**

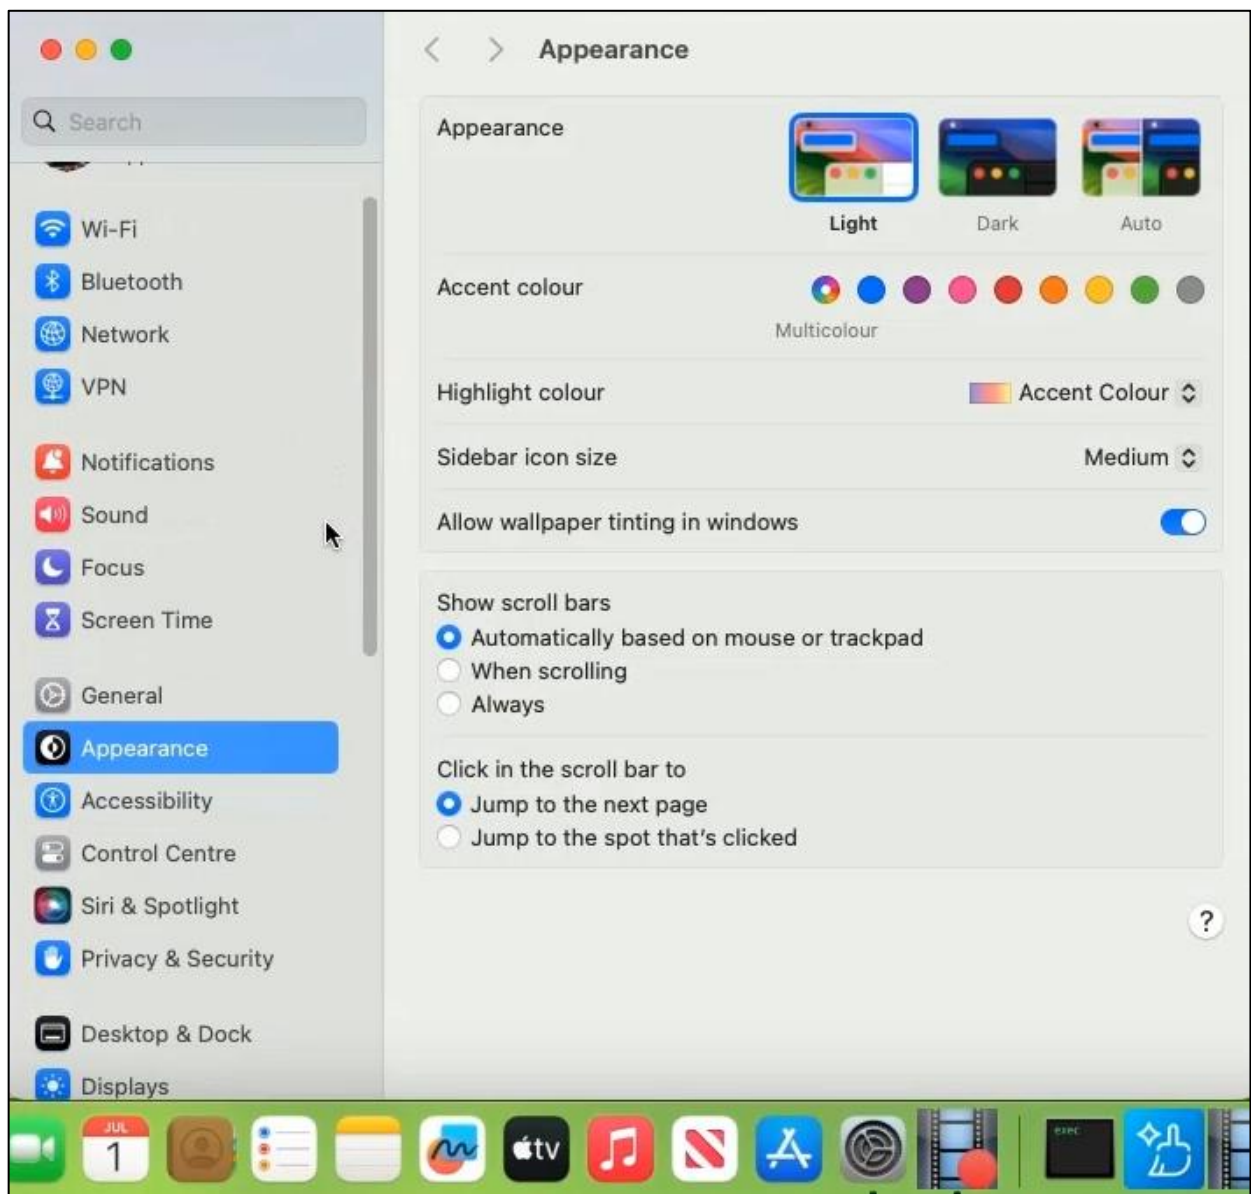

16. Scroll to the bottom and choose **“Printers & Scanners”**



17. Next click on **“Add Printer, Scanner or Fax...”**

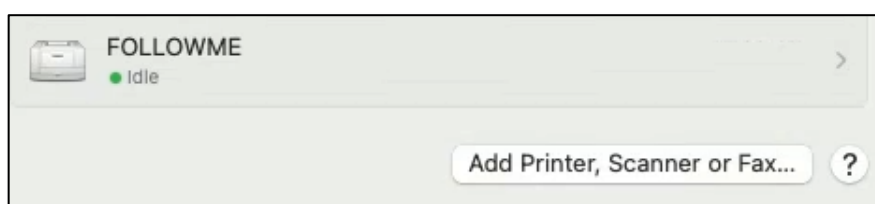


18. Choose “IP” on the top of the screen.
- Add the IP **Address** of your Printer
 - Protocol** of Line Printer Daemon (LPD)
 - Queue** name of print
 - Name** – call this whatever is your preference. We’ll use the model number for this exercise

The screenshot shows the 'Add Printer' window with the following fields and values:

- Address:** 192.168.0.70 (Valid and complete host name or address.)
- Protocol:** Line Printer Daemon - LPD
- Queue:** print (Leave blank for default queue.)
- Name:** e-STUDIO 400AC
- Location:** Ex Ref 303736
- Use:** TOSHIBA ColorMFP


An 'Add' button is located at the bottom right of the window.

19. When you get to **"Use"** click in the box to open up **"Select Software..."**

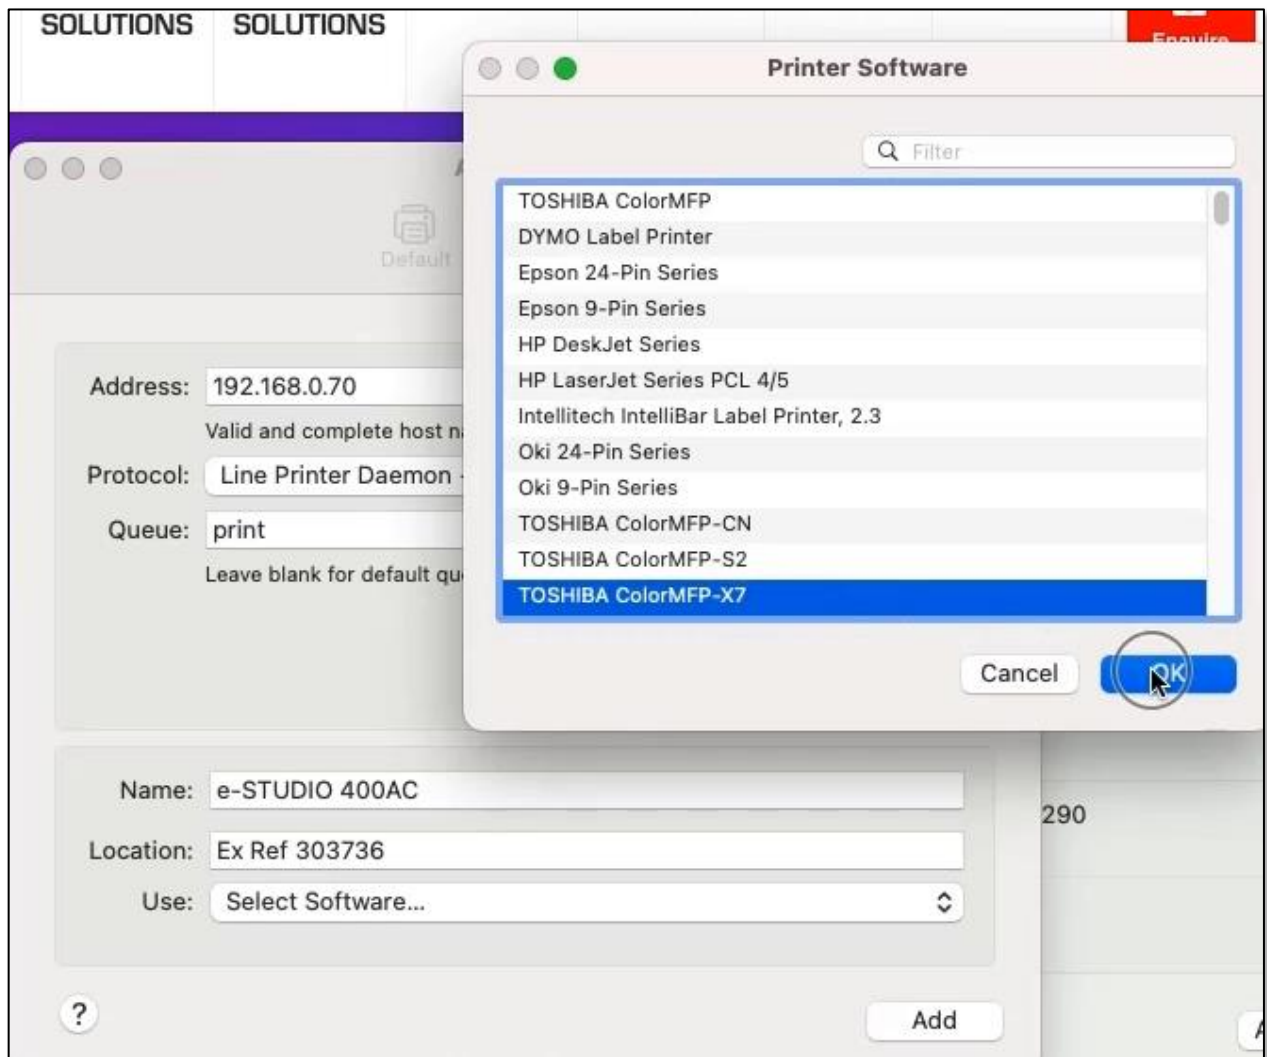


20. Earlier eBN model choose the CN drivers, others use S2 or X7

21. Now click on **"Add"** to add the copier to your Mac

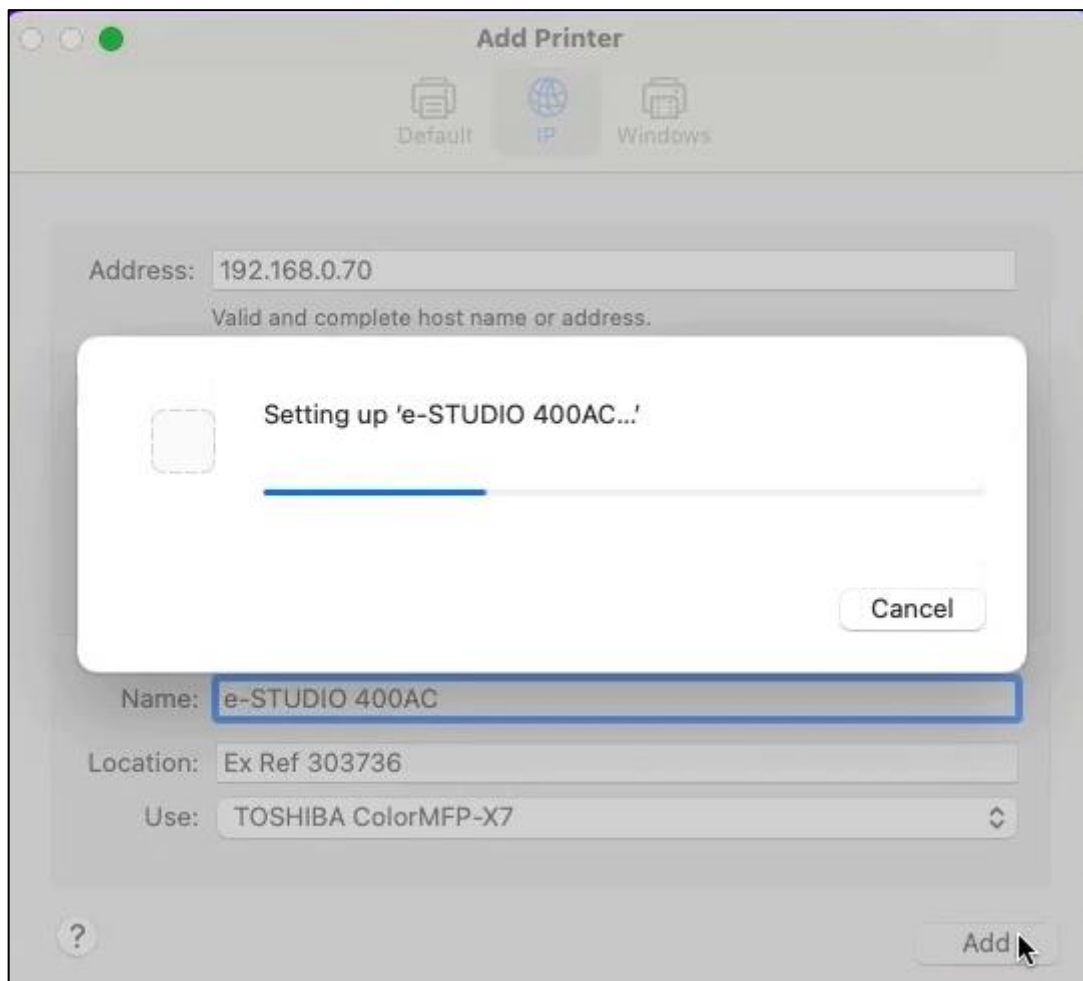

22. Next Open the **"Print Centre"**

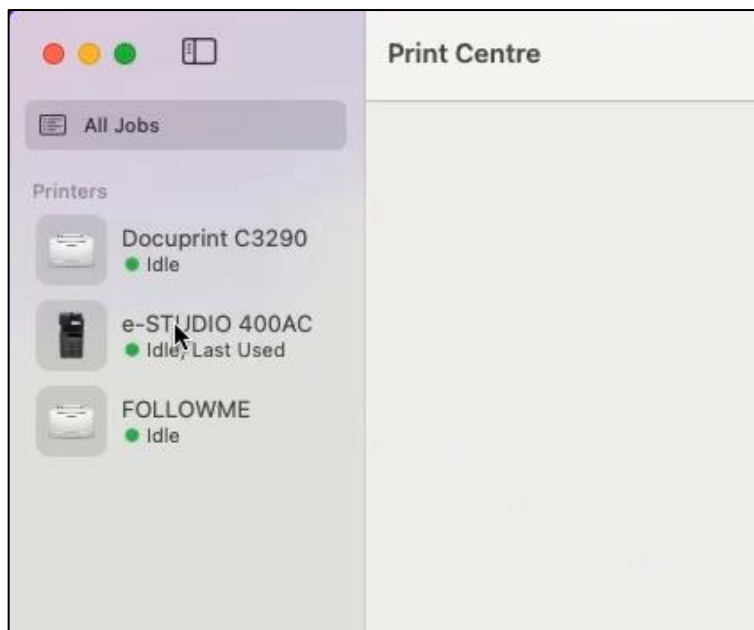


23. Double click on the driver you have just installed (e-STUDIO 400AC in this instance)

24. Click on the **"Tools"** icon on the top right of the screen



25. Now click on the **"Options"** Tab, and ensure all options installed are showing

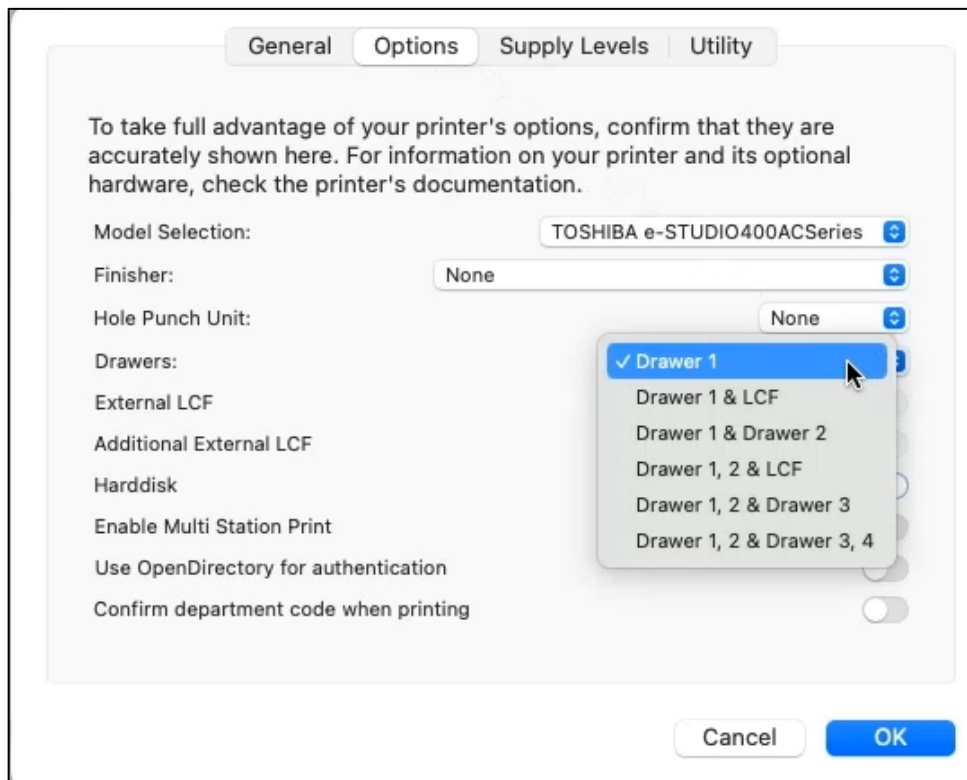

26. Click on Utility and click on **"Print Test Page"**

