



TOSHIBA

WINDOWS 11 DRIVER SETUP

Microsoft Windows 11



Microsoft Windows 11 Driver Installation


This guide was created to assist in the setup of your Printer or MFD. All guides were created using Windows 11

This document covers the following models

e-BRIDGE Next Series III	
Colour	
▪ e-STUDIO2020AC / e-STUDIO2021AC ▪ e-STUDIO2525AC / 3025AC / 3525AC / 4525AC / 5025AC / 6525AC ▪ e-STUDIO5516AC / 6516AC / 7516AC	
Monochrome	
▪ e-STUDIO2528A / 5528A / 6528A ▪ e-STUDIO7529A / 9029A	
e-BRIDGE Next Series II	
Colour	
▪ e-STUDIO2010AC ▪ e-STUDIO2515AC / 3015AC / 3515AC / 4515AC / 5015AC ▪ e-STUDIO5516AC / 6516AC / 7516AC ▪ e-STUDIO400AC / 330AC	
Monochrome	
▪ e-STUDIO2518A ▪ e-STUDIO5518A / 7518A / 8518A	
e-BRIDGE Next Series I	
Colour	
▪ e-STUDIO2000AC ▪ e-STUDIO2505AC / 3005AC / 3505AC / 4505AC / 5005AC ▪ e-STUDIO5506AC / 6506AC / 7506AC	
Monochrome	
▪ e-STUDIO2508A / 3508A / 4508A ▪ e-STUDIO5508A / 7508A / 8508A ▪ e-STUDIO3508LP / 4508LP	

Downloading the Driver

1. Find and download your driver at <https://www.toshiba-business.com.au/support/drivers>
search for your Toshiba MFD model in the Search bar. Putting in just the model number will show the full name of your MFD. Click on the red bar below at this point

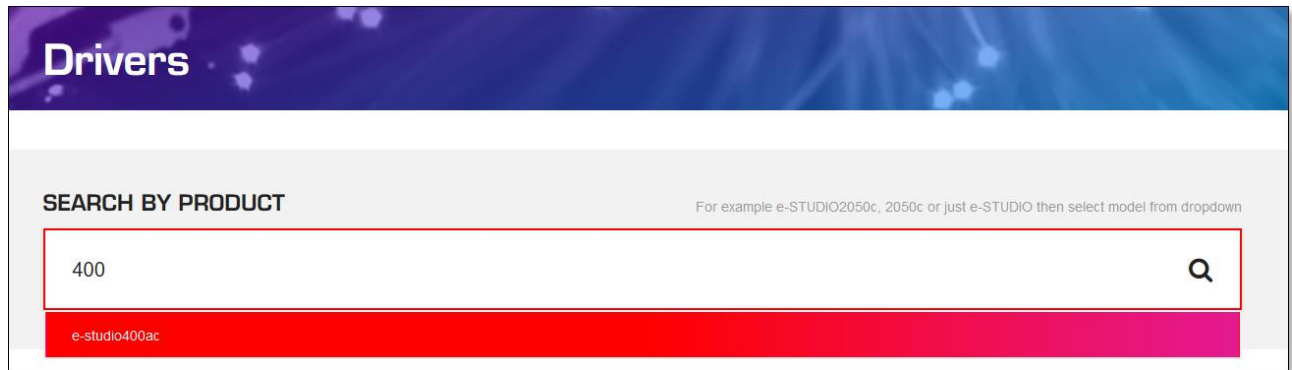


Drivers

SEARCH BY PRODUCT For example e-STUDIO2050c, 2050c or just e-STUDIO then select model from dropdown

400 

e-studio400ac

2. After searching, please select the driver of your choice and select **“Download”**

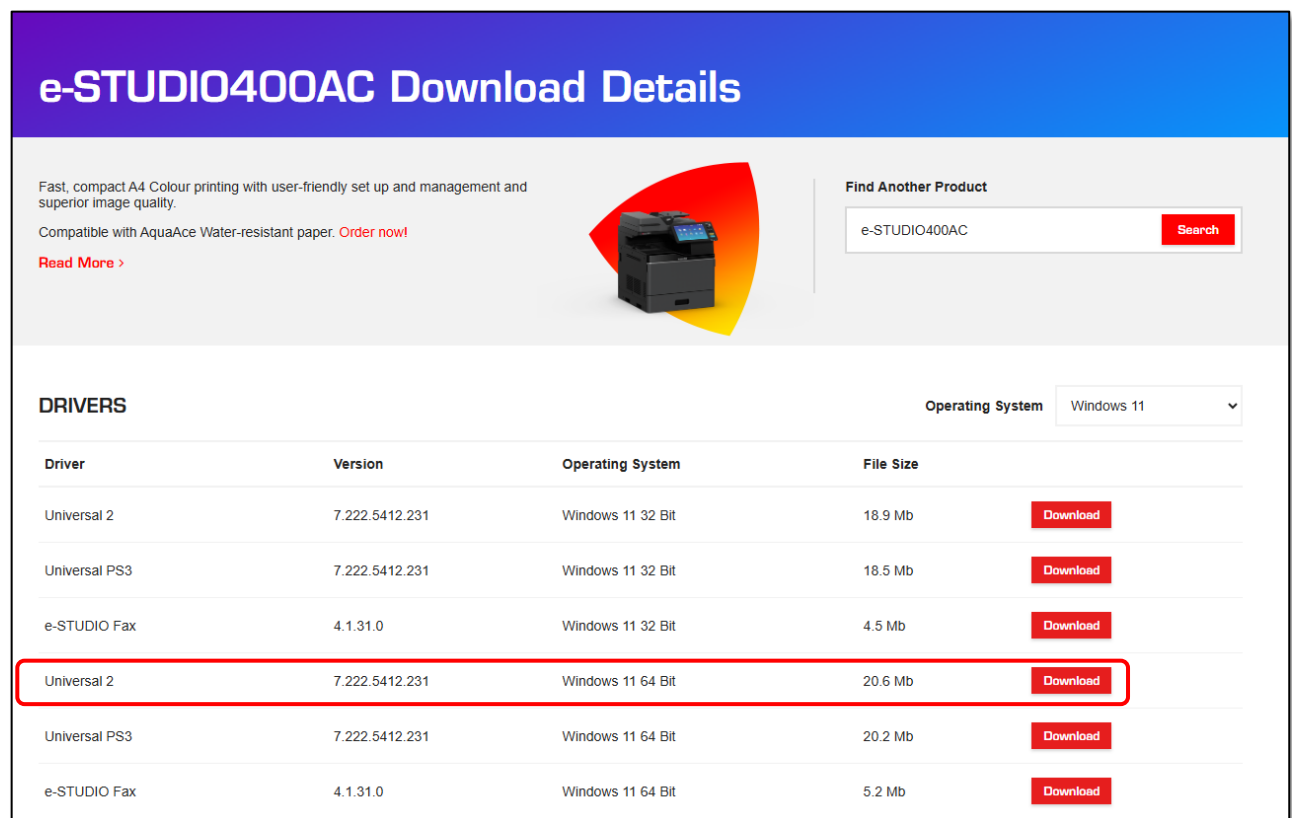

e-STUDIO400AC Download Details

Fast, compact A4 Colour printing with user-friendly set up and management and superior image quality.
Compatible with AquaAce Water-resistant paper. [Order now!](#)
[Read More >](#)




Find Another Product
e-STUDIO400AC [Search](#)

DRIVERS Operating System: Windows 11

Driver	Version	Operating System	File Size	
Universal 2	7.222.5412.231	Windows 11 32 Bit	18.9 Mb	Download
Universal PS3	7.222.5412.231	Windows 11 32 Bit	18.5 Mb	Download
e-STUDIO Fax	4.1.31.0	Windows 11 32 Bit	4.5 Mb	Download
Universal 2	7.222.5412.231	Windows 11 64 Bit	20.6 Mb	Download
Universal PS3	7.222.5412.231	Windows 11 64 Bit	20.2 Mb	Download
e-STUDIO Fax	4.1.31.0	Windows 11 64 Bit	5.2 Mb	Download

3. Click **"Open"** once the file has downloaded.

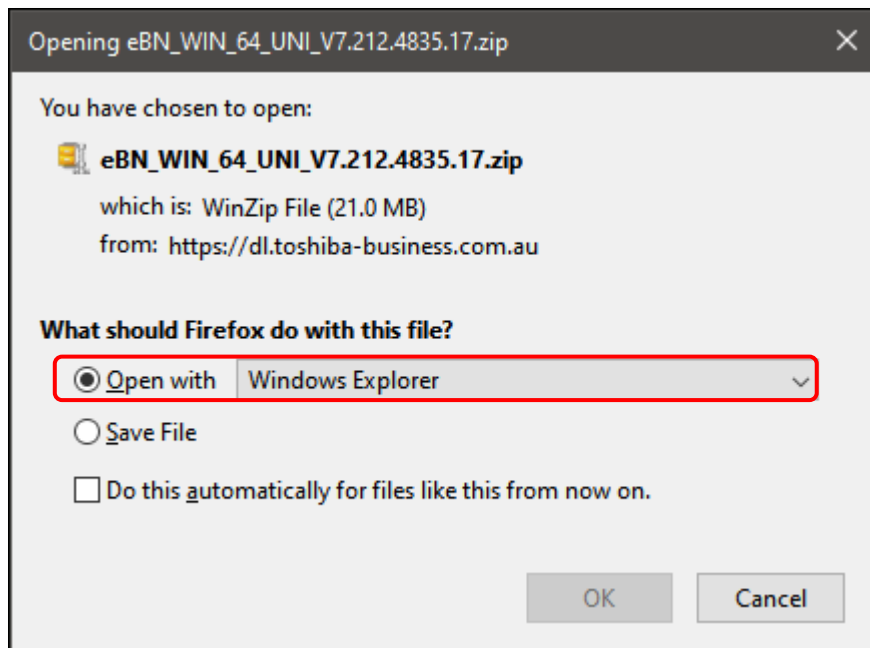


4. Browse to the downloads folder, where you will see your zipped file. Unpack the zipped file, by double clicking on it. This will unzip it to your downloads folder


Installing the Printer Driver

- 1 Then go to Control Panel, Right click on Devices and Printers and select open from the menu.


Here click **Add a Printer**

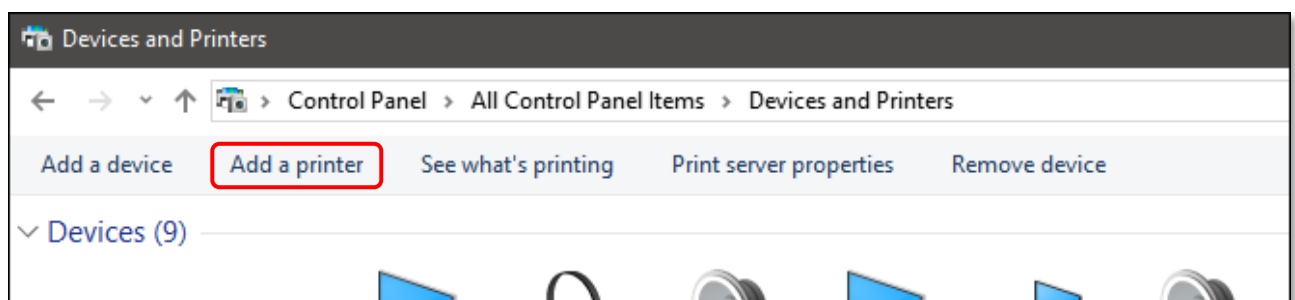

- 2 After you click on **Add Printer**, then choose **the printer I want isn't listed** then click "Next"

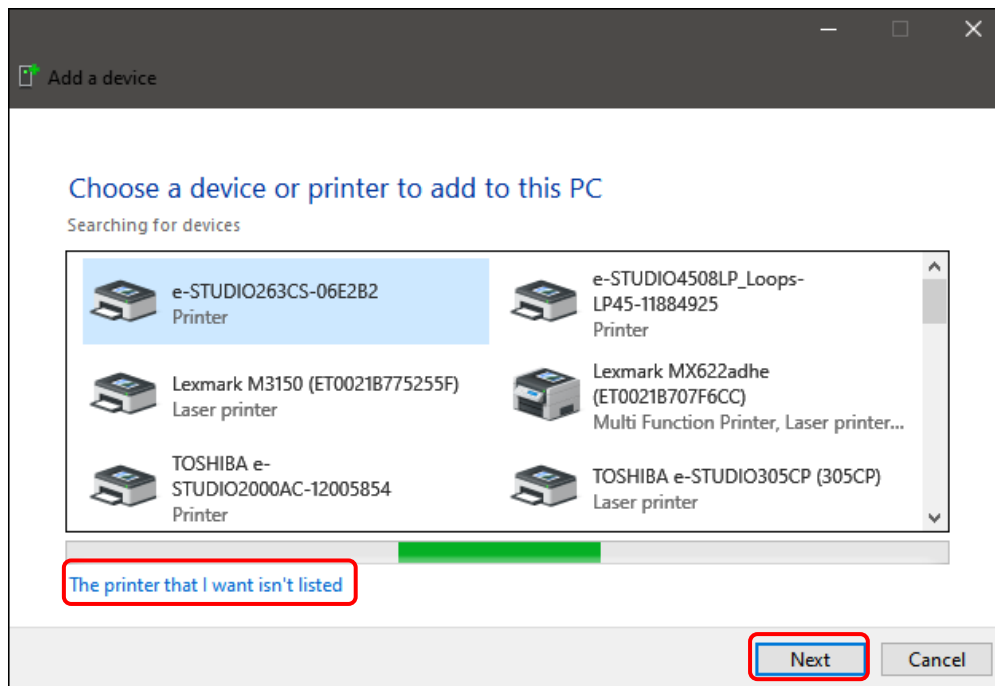

- 3 Choose **Add a local printer or network printer with manual settings** then click "Next"

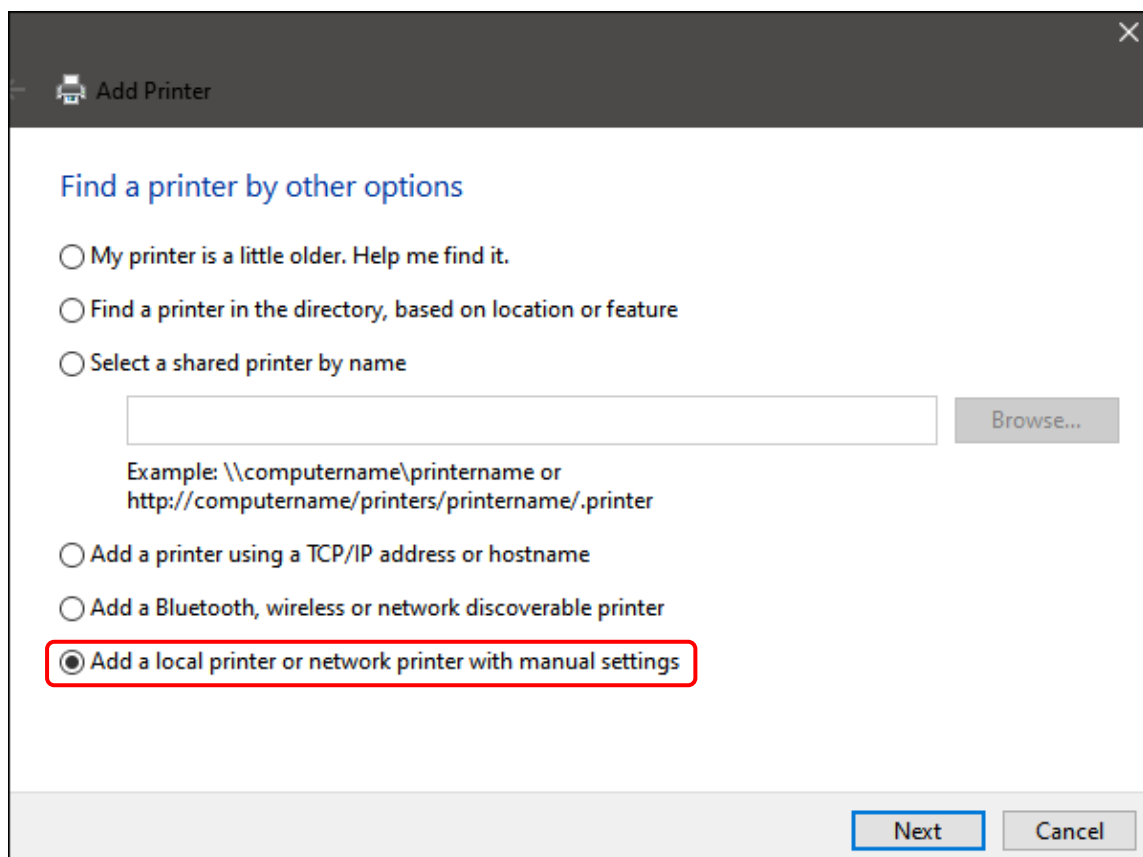


- 4 Next chose **Create a new port**. Type of port, should be **Standard TCP/IP Port** and click “Next”

The screenshot shows the 'Add Printer' wizard window. The title bar says 'Add Printer'. The main heading is 'Choose a printer port'. Below it, a text box explains: 'A printer port is a type of connection that allows your computer to exchange information with a printer.' There are two radio button options: 'Use an existing port:' with a dropdown menu showing 'LPT1: (Printer Port)', and 'Create a new port:' which is selected and highlighted with a red rectangle. Below the selected option, there is a 'Type of port:' dropdown menu showing 'Standard TCP/IP Port'. At the bottom right, there are 'Next' and 'Cancel' buttons.


- 5 Next input your **Host Name** or **IP Address** then click “Next”

The screenshot shows the 'Add Printer' wizard window at the 'Type a printer hostname or IP address' step. The title bar says 'Add Printer'. The main heading is 'Type a printer hostname or IP address'. Below it, there is a 'Device type:' dropdown menu showing 'TCP/IP Device'. There are two text input fields: 'Hostname or IP address:' and 'Port name:', both containing the IP address '10.61.240.135' and highlighted with a red rectangle. Below these fields, there is a checkbox labeled 'Query the printer and automatically select the driver to use' which is unchecked. At the bottom right, there are 'Next' and 'Cancel' buttons.


- 6 Here choose **Have Disk** then click "Next"

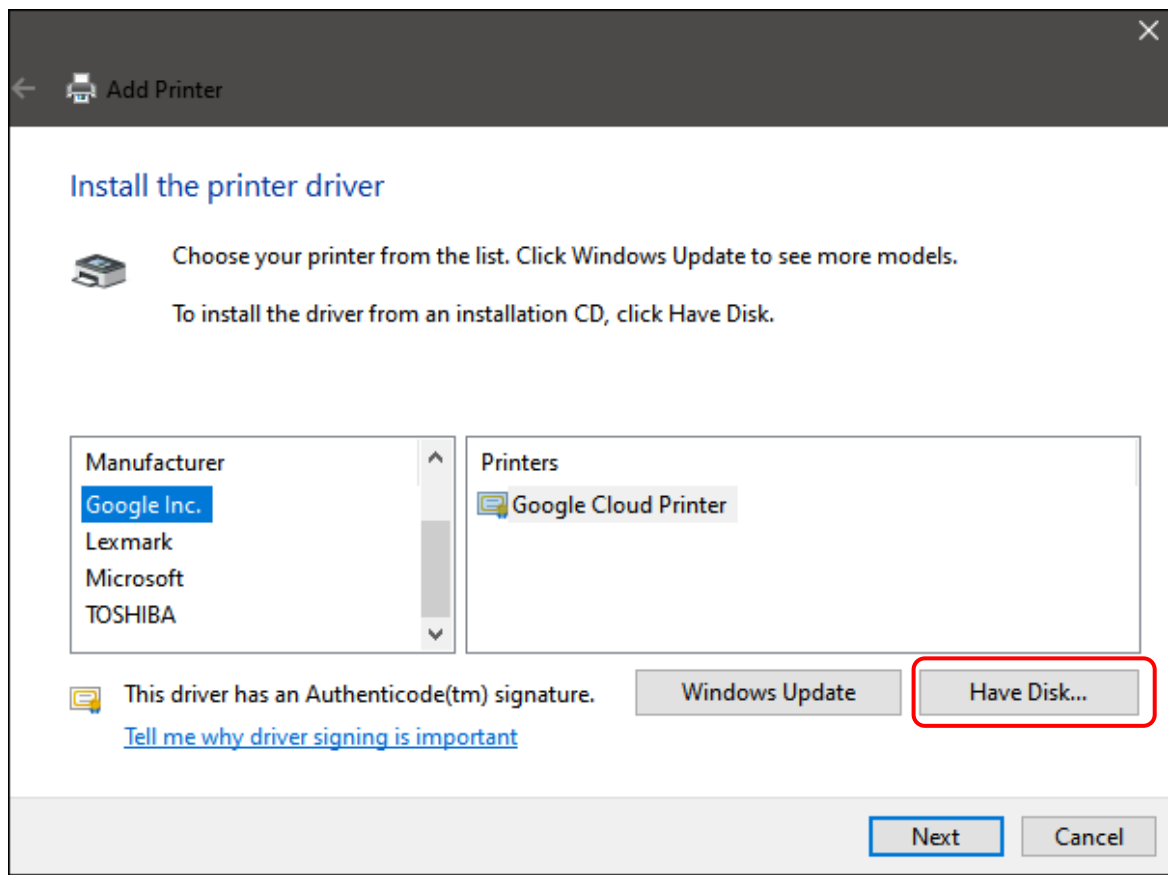


- 7 Now browse to your downloads folder where you dragged the driver to, select the Esf6h.inf file and click "Open"

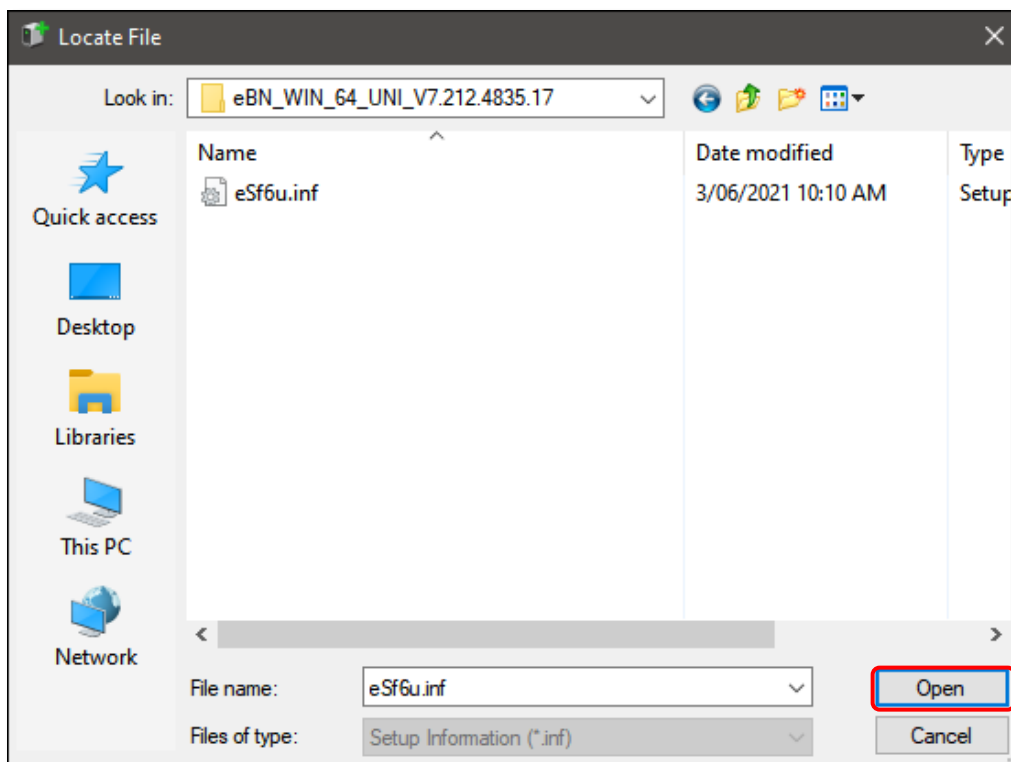


- 8 Here we chose to install the Universal 2 driver (recommended) then hit "Next"

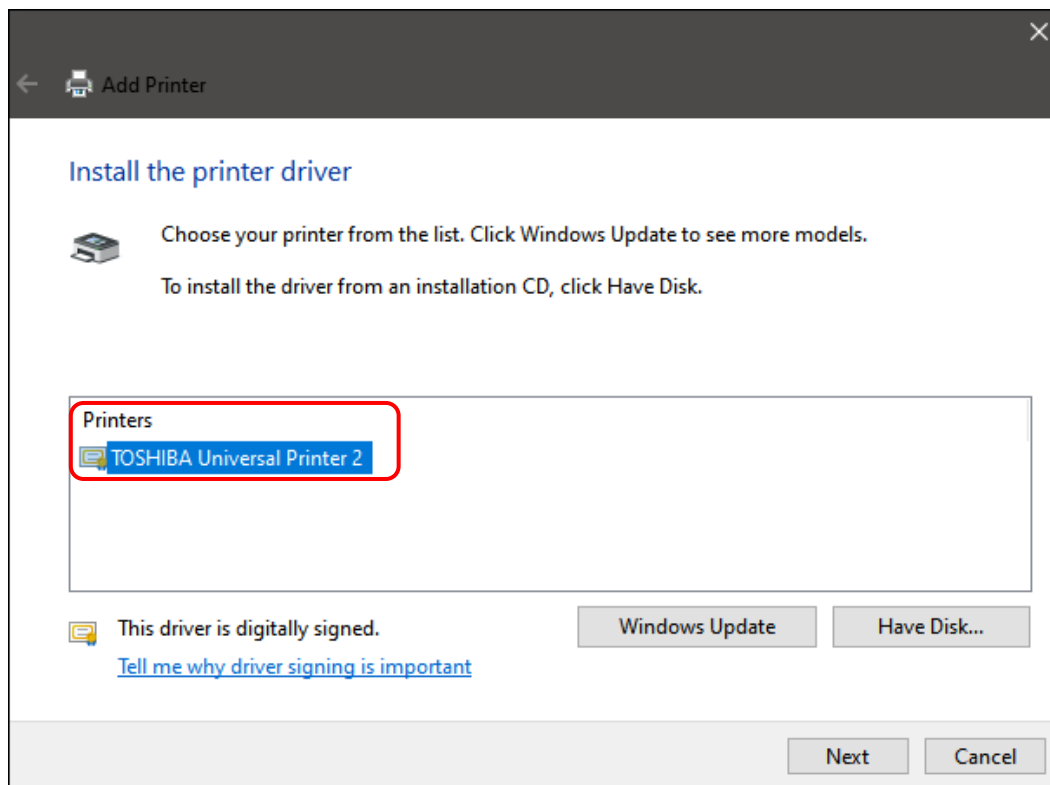

- 9 You are either updating or installing a new driver. Here **Replace the current driver** and click "Next"

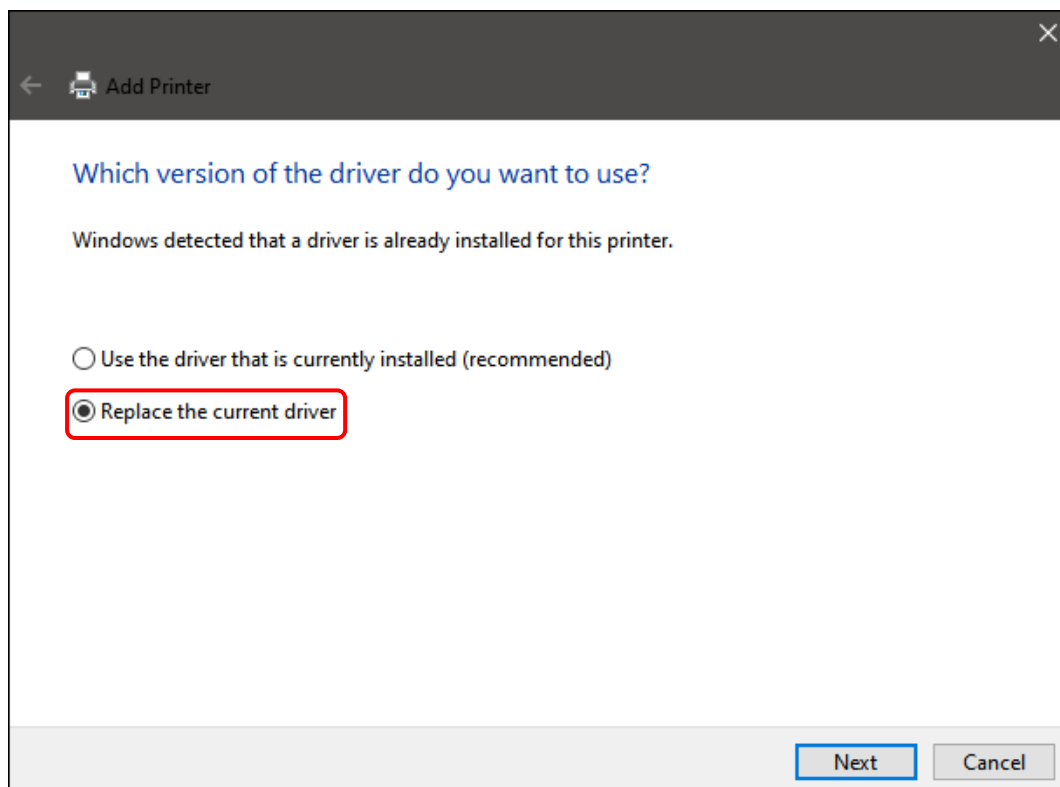


10 Next name your printer so it will be easy to find on your printer list.

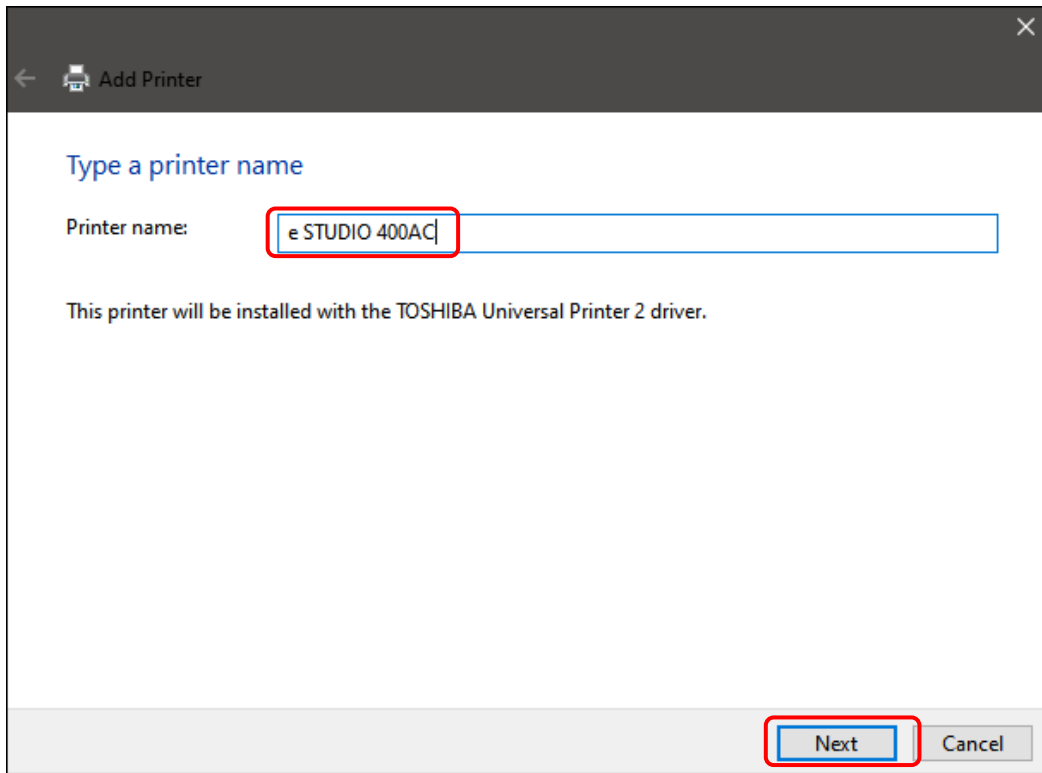

The screenshot shows a Windows 'Add Printer' window. The title bar says 'Add Printer'. Below the title bar, there's a section titled 'Type a printer name'. Under this, it says 'Printer name:' followed by a text input field containing 'e STUDIO 400AC'. Below the input field, it says 'This printer will be installed with the TOSHIBA Universal Printer 2 driver.' At the bottom right, there are two buttons: 'Next' and 'Cancel'. The 'Next' button is highlighted with a red rectangle.


11 Click on "Next" and this will install your printer driver

12 Here you can choose to Share your printer if on a server. Otherwise click "Next"

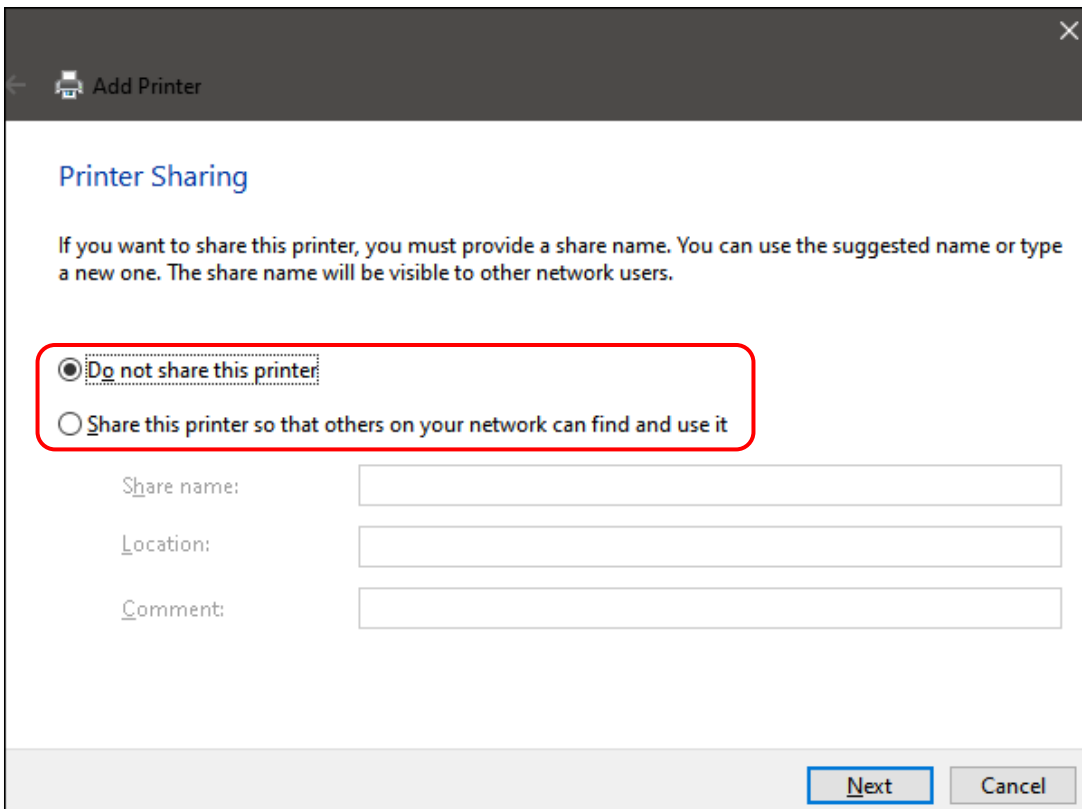


The screenshot shows the 'Printer Sharing' step in the 'Add Printer' window. The title bar says 'Add Printer'. Below the title bar, there's a section titled 'Printer Sharing'. Under this, it says 'If you want to share this printer, you must provide a share name. You can use the suggested name or type a new one. The share name will be visible to other network users.' Below this text, there are two radio buttons. The first radio button is selected and is labeled 'Do not share this printer'. The second radio button is labeled 'Share this printer so that others on your network can find and use it'. Below the radio buttons, there are three text input fields labeled 'Share name:', 'Location:', and 'Comment:'. At the bottom right, there are two buttons: 'Next' and 'Cancel'. The 'Next' button is highlighted with a red rectangle.

13 The last step is to **set as the default** if required. Then hit **Finish**

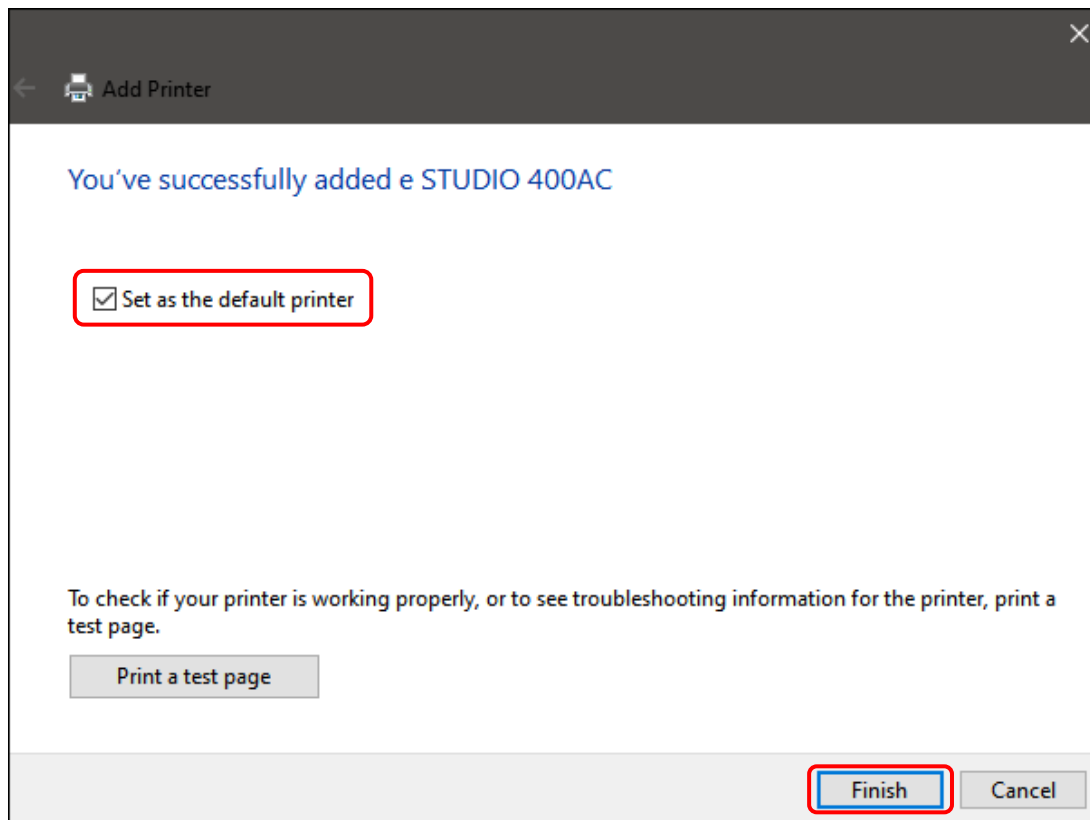


Printer Driver Configuration


1 Next you need to **right click** on your printer driver and go to **Printer Properties**

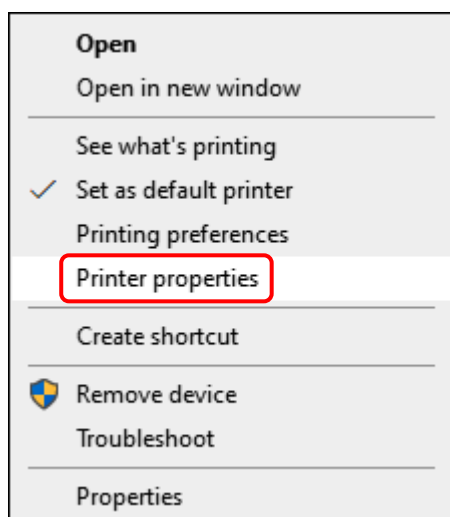


2 Then click on the **Advanced Tab** and go to **Printing Defaults**

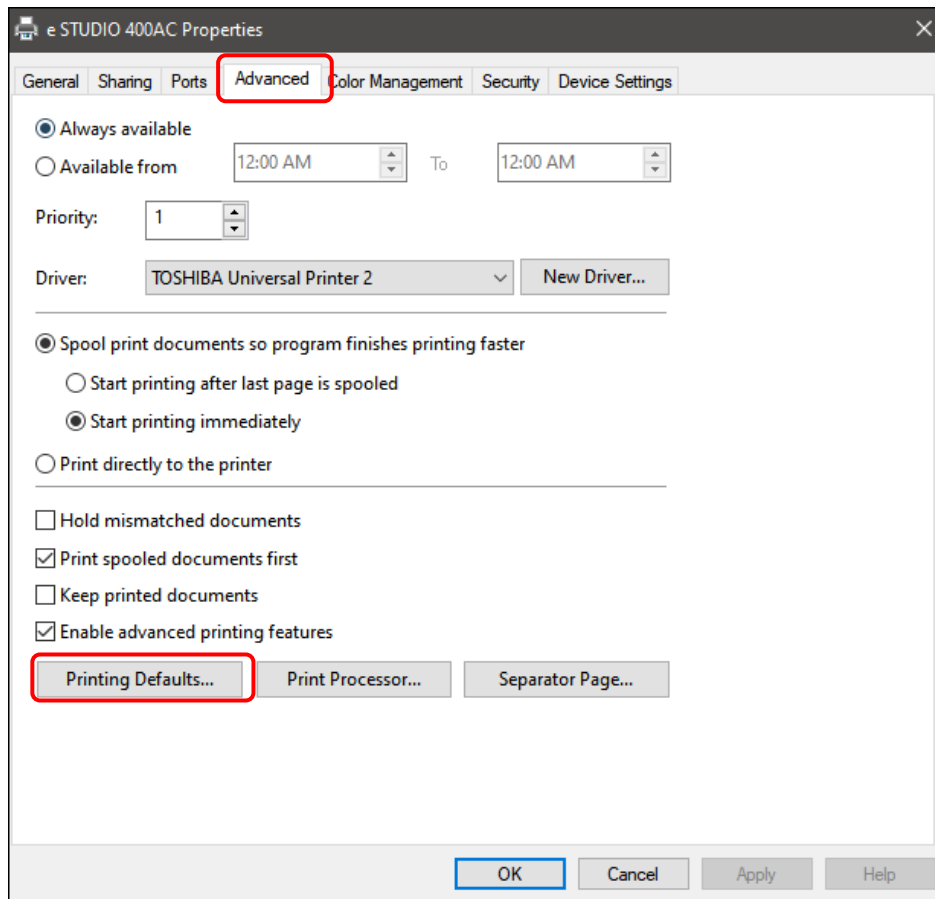


- 3 Next ensure the MFD is setup for **A4**, as this will generally be set to US Letter

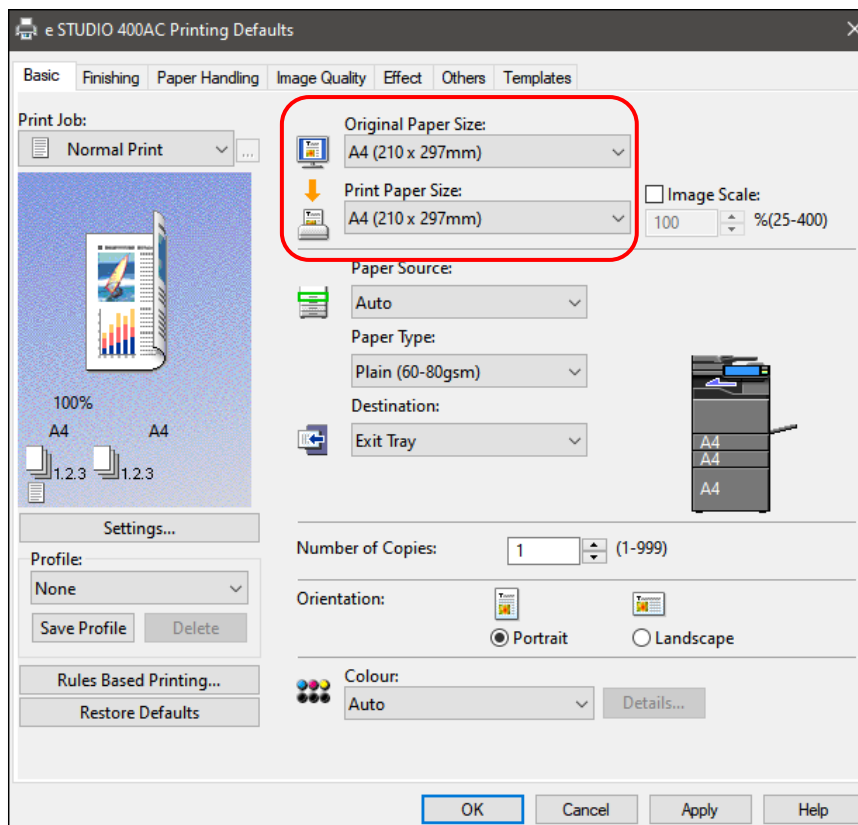

- Next from the **General** tab, click on **Preferences** ensure the A4 settings have been retained

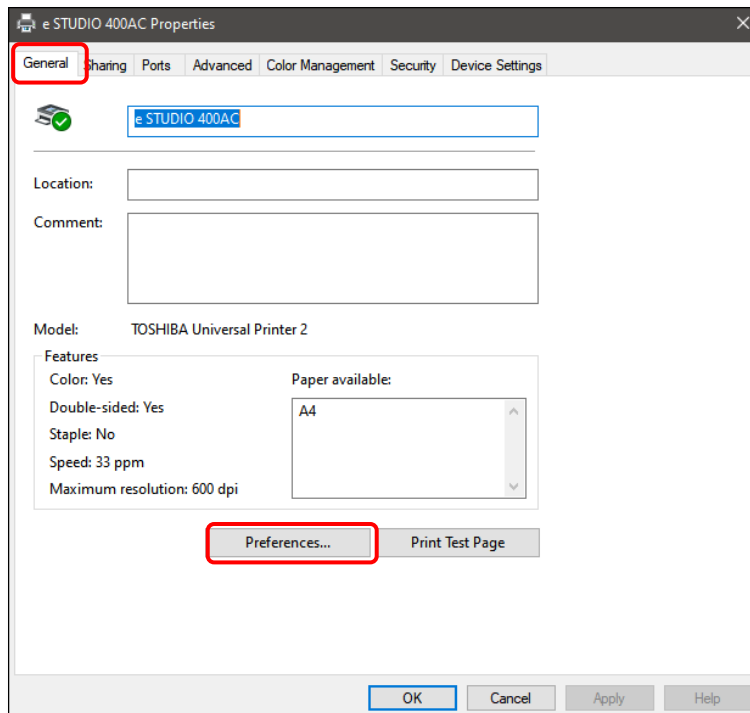

- Lastly click on **"Ports"** **"Configure Port"** and set queue name to print

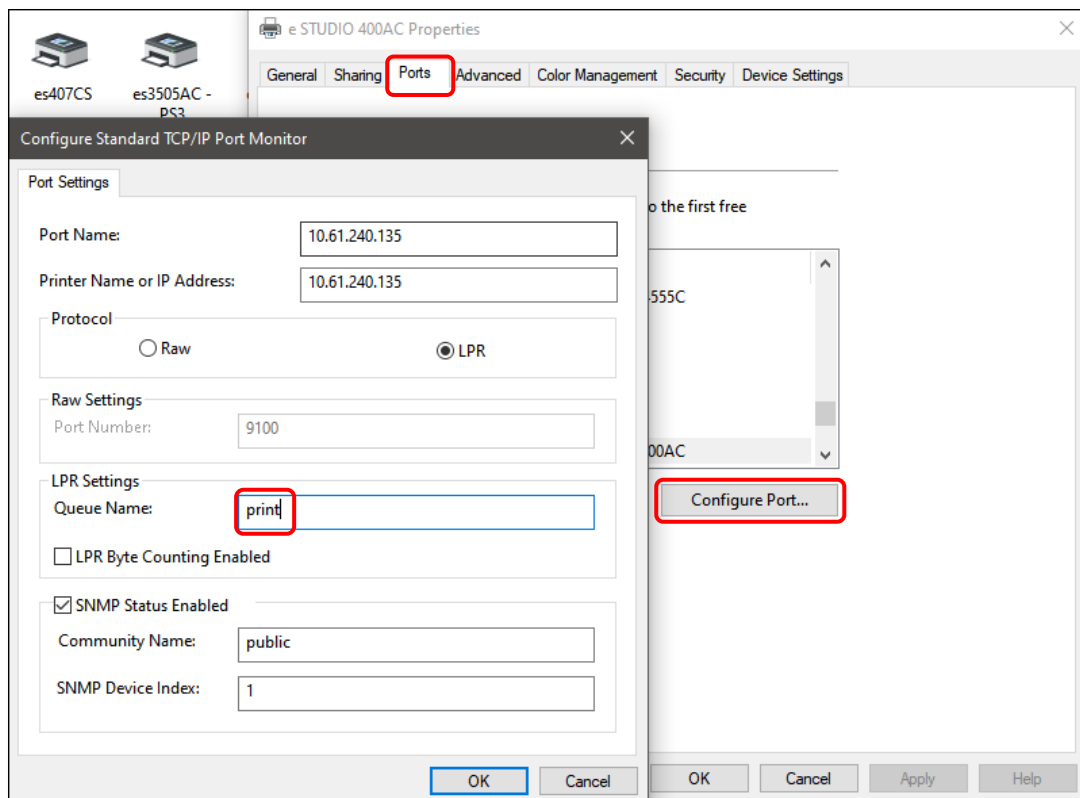

- Then click OK to complete the driver installation.